


Designed specifically for the CM-Series external-mount end block, the SRM-Bar™ is used with an 80 mm ID target tube.

Features

- Advanced magnetics designed using 3D finite element analysis software
- Large magnet, single-row design
- Hermetically sealed, high-strength magnets
- Magnets are matched in strength within 1%
- Simple magnetic uniformity tuning
- Easily installed in any orientation

Benefits


- Superior target utilization and reduced cross corner effects
- Narrow deposition profile minimizes coating loss to shields
- Longer campaigns due to less downtime and increased productivity

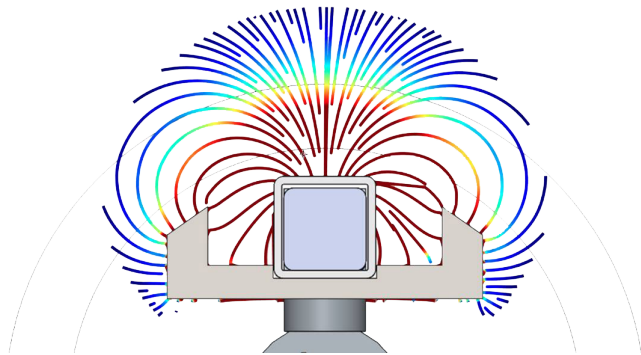

SRM-Bar™ magnetic field



SRM-Bar™ magnetics

Maximum target diameter	115 mm
Sputter angle	$\pm 21^\circ$
Target material utilization	> 85%
Application	80 mm ID targets, acceptable with most material
Guarantee	

All specifications are for 100 mm OD targets