Internal-Mount End Block TC-Series

Designed to replace planar cathodes where space is very limited on the ends, the TC-Series internal-mount end block provides performance in a compact package.


The TC end block is the most compact design available for standard 125 mm ID industrial targets but is a two-ended design.

Use it to upgrade from planar systems to increase the output and quality of your existing coater.

TECHNICAL SPECIFICATIONS	
Electrical C rating	40 kW 1500 V, 100 A (DC or 80 kHz AC)
Mounting	Any orientation
Target 💽	125 mm ID 1500 mm max. length
Maximum 💽 load	250 kg horizontal 100 kg vertical
Vacuum seal 🜔 leak rate	<3×10 ⁻⁷ mbar·L/s
Maintenance 🜔 (typical)	Seal kit and bushings every year (2 hr) Static seals





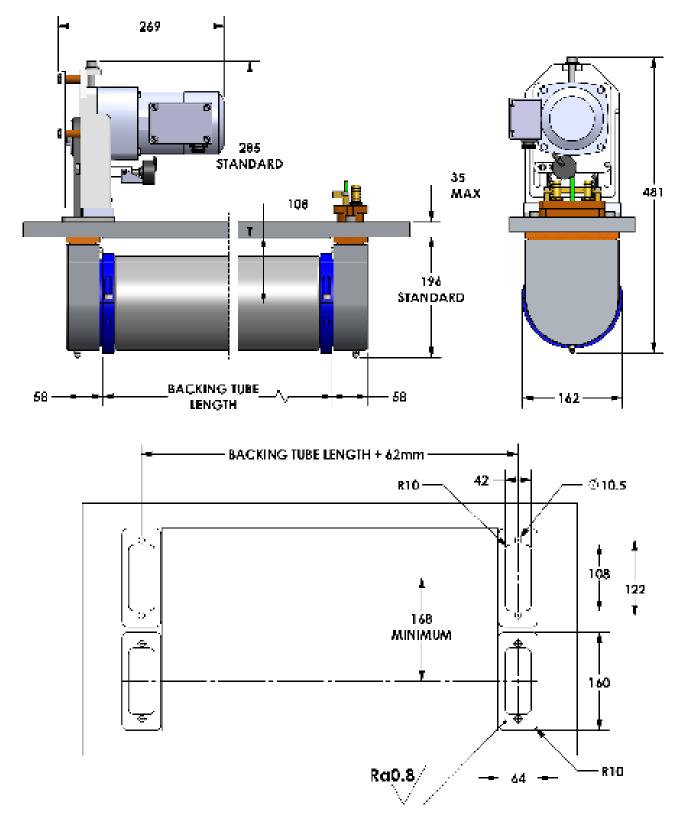

Dimensions in mm

